

DISTRIBUIDOR EXCLUSIVO PARA PORTUGAL



Tel: +351 217 121 000
E-mail: info@comercialfoto.pt
www.comercialfoto.pt



lojab2b.comercialfoto



linktr.ee/nanliteglobal



WWW.NANLITE.COM

NANLITE

Light Your Frames!

Guangdong Nanguang Photo&video Systems Co., Ltd



NANLITE

The way we capture images is evolving. It's making content creation more approachable and diverse than it's ever been before. Projects that could only be accomplished by large studios and huge budgets are now in reach of anyone with a dream and the dedication to chase it. It's time for lighting to redefine itself and evolve as well. With this in mind NANGUANG, a company passionately dedicated to the lighting industry for 27 years, has started a new brand — NANLITE.

At NANLITE we strive to design lighting products that provide image makers with new possibilities and push them to expand their creative horizons as we vow to expand ours as well. We listen to customer feedback, focus on design details, and optimize the user experience of our products. We stand behind all of our products and provide the best technical support available to help you accomplish your vision effortlessly.

Our long history has taught us how to carefully select our materials, continually improve our manufacturing processes, and maintain strict quality control on all of our products. We hold ourselves to the highest standards in manufacturing and design in hopes that the lights we produce will ignite new ideas for image making. We believe the value of our lights is not just in the light itself; it's more about helping creatives realize their vision. We hope that with our lighting a creator's only limitation will be their imagination.

CONTENTS

01-10	Forza Series Spot Light
11-14	MixPanel Series RGBWW LED Panel
15-20	PavoTube Series RGBWW Tube Light
21-26	Mix Series RGB Light
27-29	LumiPad Series Soft Panel
30-34	Compac Series Studio Light
35-36	LitoLite Series LED Focusable Light
37-44	halo Series Ring Light
45-50	SA Series LED Panel
51-58	Lighting Modifiers & Accessories & Bag
59-60	Backdrop Elevator Series

More products, please visit www.nanlite.com



Forza Series Spot Light

Compact Design . Ultra Bright

Forza 60/60B

Palm-Sized Lightweight Design, Mighty Output

Forza 60B Bi-color

1. Variable color temperture of 2700K-6500K, CRI: Average 96, TLCI: Average 98.
2. Palm-sized body with mighty output (13830 Lux @1 meter (5600K) with standard reflector).
3. 12 bulit-in upgraded practical lighting effects:CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding.
4. A mini mount & Optional standard Bowens mount.
5. Power anywhere, run with AC adapter ,NPF batteries or a V-mount battery.
6. Support firmware updates via USB-port & Wireless control via 2.4G.

Forza 60 Daylight

1. Accurate daylight-balanced colors at 5600K, CRI: 98 and TLCI: 95
2. Palm-sized body with mighty output (18820 Lux @ 1 meter (5600K) with standard reflector).
3. 4 bulit-in practical lighting effects: Storm, Flash, TV, Bad bulb.
4. A mini mount & Optional standard Bowens mount.
5. Power anywhere, run with AC adapter, NPF batteries or a V-mount battery.



Standard Configuration

Light ×1, Power adapter ×1, Power Cable ×1, Reflector ×1, Carrying bag ×1



Forza 60/60B Accessories (Optional)

	SB-FZ60 + EC-FZ60 Parabolic Softbox with eggcrate (Eggcrate: Optional)		AS-BA-FZ60 Bowens Adapter
	LT-FZ60 Lantern Softbox		BT-BA-SNP/DC Sony NP Battery adapter
	FL-11 Fresnel Lens		BT-BA-V V-mount battery adapter with clamp
	Projection Attachment		CB-DT/DC D-tap cable
	BH-FZ60 Battery Grip (suggested to work with NP-F970)		RC-1 Remote Controller
	BH-FZ60-V V-mount Battery Grip		NanLink Lighting Control System

Forza Technical Data

Model		Forza 60					Forza 60B							
LED Total Power		60W					60W x 2							
Input Voltage/Current		DC15V/6A Max, AC100-240V 50/60Hz					DC15V/6A Max, AC100-240V 50/60Hz							
CRI		98					Average 96							
TLCI		95					Average 98							
CCT		3200K / 5600K					2700K - 6500K							
Dimming		0 to 100 % continuous					0 to 100 % continuous							
Control		On-board controller, 2.4G					On-board controller, 2.4G							
Product Size		199 × 85 × 105 mm / 7.83 × 3.35 × 4.13"					199 × 85 × 105 mm / 7.83 × 3.35 × 4.13"							
Product Weight	Light fixture	0.83 kg / 1.83 lb					0.83 kg / 1.83 lb							
	Light fixture+ Power Adapter	1.28 kg / 2.82 lb					1.28 kg / 2.82 lb							
Illumination[lux /fc]														
Model/CCT		Forza 60/5600K					Forza 60B/3200K				Forza 60B/5600K			
Distance		1M	2M	3M	4M	5M	1M	2M	3M	4M	1M	2M	3M	4M
Without lens		3139 lux 292 fc	759 lux 71 fc	354 lux 33 fc	207 lux 19 fc	137 lux 13 fc	1919 lux 178 fc	480 lux 45 fc	224 lux 21 fc	134 lux 12 fc	2246 lux 209 fc	564 lux 52 fc	263 lux 24 fc	156 lux 14 fc
With Standard reflector		18820 lux 1748 fc	4011 lux 373 fc	1685 lux 157 fc	934 lux 87 fc	605 lux 56 fc	11480 lux 1066 fc	2420 lux 225 fc	1030 lux 96 fc	567 lux 53 fc	13830 lux 1285 fc	2927 lux 272 fc	1251 lux 116 fc	687 lux 64 fc
With Fresnel lens Spot 10°		38315 lux 3563 fc	8652 lux 805 fc	3770 lux 351 fc	2080 lux 193 fc	1310 lux 122 fc	27400 lux 2545 fc	6418 lux 596 fc	2813 lux 261 fc	1565 lux 145 fc	33450 lux 3108 fc	7944 lux 738 fc	3476 lux 323 fc	1924 lux 179 fc
With Fresnel lens Flood 45°		8620 lux 802 fc	2299 lux 214 fc	1894 lux 176 fc	578 lux 54 fc	375 lux 35 fc	5978 lux 555 fc	1458 lux 135 fc	646 lux 60 fc	367 lux 34 fc	7100 lux 660 fc	1736 lux 161 fc	777lux 72 fc	437 lux 41 fc



Forza 200/300/500 LED Daylight Spot

Compact Design . Powerful Output . Special Lighting Effects . Bowens Mount



Forza 200

1. Accurate daylight-balanced colors at 5600K, CRI: 98 TLCI: 97
2. High 200W output, 37540 Lux @ 1m (with standard reflector).
3. 11 bulid-in upgraded practical lighting effects -- INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding.
4. Separate design for fixture head and control unit & Dual power supply.
5. Standard Bowens Mount.
6. USB port to support firmware updates & Control via 2.4G or DMX.

Forza 300/500


1. Accurate daylight-balanced colors at 5600K, CRI: 98 and TLCI:95
2. High output of 300W/500W.
3. 4 bulid-in practical lighting effects: Storm, Flash, TV, Bad bulb
4. Separate design for fixture head and control unit & Dual power supply.
5. Standard Bowens Mount.
6. Control via 2.4G or DMX.

Standard Configuration

Light ×1, Control Unit×1, Power adapter×1, Power Cable×1, Connecting Cable×1, COB protective cap×1, Reflector×1, Light stand clamp×1, Carrying bag×1




Forza 200/300/500 Accessories (Optional)

	BT-V-14.8V160 Battery V-mount 14.8V 160WH BT-CGV-14.8V-1 Battery Charger for Single 14.8V V-mount Battery		FL-20G Fresnel Lens
	BT-V-26V230/BT-V-26V270 Battery V-mount 26V 230WH/270WH BT-CGV-26V-1/BT-CGV-26V-2 Battery Charger for Single/Dual 26V V-mount Battery	 	SB-ST-140X30 Strip Softbox SB-AS-110X45 Asymmetric Softbox EC-140X30/EC-110X45 Eggcrate (Optional)
	CB-FZ-5 Forza 5M Connector Cable		LT-FZ60/LT-80/LT-120 Lantern Softbox
	RC-1 Remote Controller	 	SB-PR-90/120/150 Parabolic Softbox SB-PR-90/120-Q Quick Setup Parabolic Softbox EC-PR90/120/150 Eggcrate(Optional)
	NanLink Lighting Control System		U-135DS/U-165DT/U-180ST Umbrella

Forza Technical Data

Model		Forza 200				Forza 300				Forza 500				
LED Total Power		200W				300W				500W				
Input Voltage/Current		DC24V/10.4A Max, AC100-240V 50/60Hz				DC48V/8.4A Max, AC100-240V 50/60Hz				DC48V/12.5A Max, AC100-240V 50/60Hz				
CRI		98				98				98				
TLCI		97				95				95				
CCT		3200K / 5600K				3200K / 5600K				3200K / 5600K				
Dimming		0 to 100 % continuous				0 to 100 % continuous				0 to 100 % continuous				
Control		On-board controller, 2.4G, DMX				On-board controller, 2.4G,DMX								
Product Size		315 × 210 × 115 mm / 12.40 × 8.27 × 4.53"				330 × 225 × 120 mm / 12.99 × 8.86 × 4.72"				330 × 225 × 140 mm / 12.99 × 8.86 × 5.51"				
Product Weight	Light fixture	1.78 kg / 3.92 lb				2.3 kg / 5.07 lb				2.7 kg / 5.95 lb				
	Light fixture+ Control Unit+ Power Adapter	4.04 kg / 8.9 lb				5.04 kg / 11.11 lb				6.00 kg / 13.23 lb				
Illumination[lux /fc]														
Model		Forza 200				Forza 300				Forza 500				
Distance		1M	2M	3M	4M	1M	3M	5M	9M	1M	3M	5M	9M	12M
Without lens		9213 lux 856 fc	2215 lux 206 fc	1029 lux 96 fc	617 lux 57 fc	13200 lux 1226 fc	1630 lux 151 fc	622 lux 58 fc	214 lux 20 fc	20070 lux 1865 fc	2276 lux 211 fc	888 lux 82 fc	307 lux 29 fc	180 lux 17 fc
With Standard reflector		37540 lux 3487 fc	7881 lux 732 fc	3351 lux 311 fc	1852 lux 172 fc	68060 lux 6323 fc	5795 lux 538 fc	2034 lux 189 fc	666 lux 62 fc	93350 lux 8672 fc	8245 lux 766 fc	2933 lux 272 fc	961 lux 89 fc	457 lux 43 fc
With Fresnel lens Spot 10°		126413 lux 11744 fc	33490 lux 3111 fc	13400 lux 1245 fc	7929 lux 737 fc	128679 lux 11967 fc	14250 lux 1325 fc	4906 lux 456 fc	1456 lux 135 fc	N/A	25090 lux 2333 fc	8637 lux 803 fc	2606 lux 242 fc	1462 lux 136 fc
With Fresnel lens Flood 45°		24780 lux 2302 fc	3140 lux 292 fc	1767 lux 164 fc	1572 lux 146 fc	39805 lux 3702 fc	4500 lux 419 fc	1714 lux 159 fc	604 lux 56 fc	48810 lux 4539 fc	6084 lux 566 fc	2242 lux 209 fc	752 lux 70 fc	467 lux 46 fc

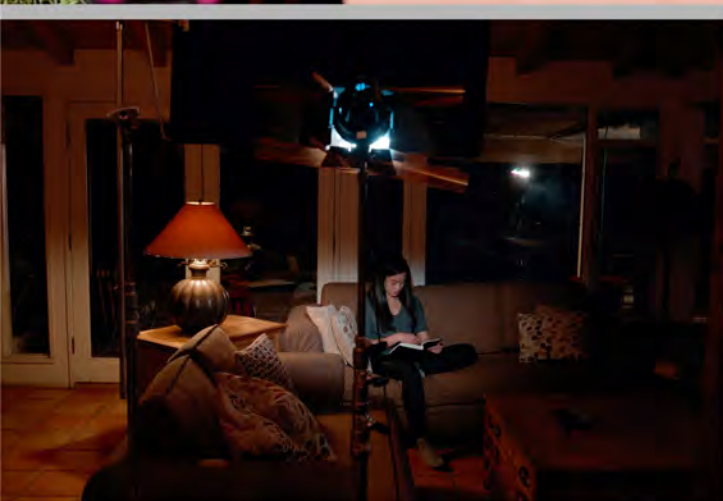

Forza Series

Powerful illumination in a compact lightweight design, ranging from 60W to 500W, the Forza series is perfect for all different scale of production.

Forza Kit

Forza 60 2KIT-PT

Forza 60 × 2
AC Power adapter 15V6A × 2
RF-FZ60 Reflector × 2
FL-11 Fresnel Lens (with barndoor) × 1
BH-FZ60 Battery Grip × 2
CC-PT-37 Trolley Case × 1

Forza 60 3KIT-PT

Forza 60 × 3
AC Power adapter 15V6A × 3
RF-FZ60 Reflector × 3
FL-11 Fresnel Lens (with barndoor) × 1
BH-FZ60 Battery Grip × 3
CC-PT-37 Trolley Case × 1

Forza 60/ LumiPad 25 3KIT-P

Forza 60 × 1
AC Power adapter 15V6A × 1
RF-FZ60 Reflector × 1
LumiPad 25 with power adapter (15V2A) × 2
BH-FZ60 Battery Grip × 1
CC-P-38 Carry Case × 1

Forza 500 2 KIT

Forza 500 × 2
RF-BM Reflector × 2
Control box unit with AC Power adapter × 2
CB-FZ-2.5 Connecting Wire 2.5M × 2
Light stand clamp × 2
Trolley Case × 1



[Light stand is not included]



MixPanel RGBWW LED Panel light

RGBWW LED Panel, DMX and WiFi wireless control, Gel Emulation and Practical Effects,
Multi lighting sources, high brightness output in a compact size.



Mixing Colors, Made Easy

Imagine being able to create over 36000 color combinations with just one light!

NANLITE MixPanel allows you to access and manipulate color like never before.

Built-in multiple practical effects, couple with ultra-bright light output and the advanced functions,
give you unlimited creative potential.



Mobile APP
Control



Wireless Remote
Control



DMX

MixPanel 60/150

- CCT:** Color temperture of 2700-7500K, G/M adjustment -50~+50.
- HSI/RGBW:** Gives you full control of Hue and saturation to achieve up to 36,000 colors.
- GEL:** 43 gel presets allows for colorful creativity at a push of a button.
- Practical Effects:** Built -in ten pre-programmed, easily simulate various ccenarios.
- Three Light Sources in one:** Switch between hard light, soft light, and colored light at the touch of a button.
- Three Lighting Modes in one:** Included slient mode, normal mode and boost mode, make operating in the strictest sound conditions possible.
- Dual power supply & USB port to support firmware updates.**
- Multiple light shaping accessories:** Softbox, octangle softbox ect.



Standard Configuration

Light x 1, Barndoor x 1, Power Adapter x 1,
Power Cable x 1, Carrying Bag x 1

Accessories(Optional)



Mixpanel

Technical Data

Model		MixPanel 60				MixPanel 150					
LED total power		60W x 5				150W x 5					
Input voltage/current		DC15V/6A Max, AC100-240V 50/60Hz				DC15V/7.5A Max, AC100-240V 50/60Hz					
CRI		Average 95				Average 95					
TLCI		Average 95				Average 95					
CCT		2700K - 7500K				2700K - 7500K					
Dimming		0 to 100 % continuous				0 to 100 % continuous					
Control		On-board controller, 2.4G, DMX				On-board controller, 2.4G, DMX					
Special Liting Effects		Hue Loop, CCT Loop, Flash, Pulse, Storm, Police car, TV, Paparazzi, Candle / Fire, Disco									
Product Size		426 × 370 × 82 mm / 16.77×14.57×3.23"				482 × 435 × 82 mm / 18.98×17.13×3.23"					
Product Weight	Light fixture	3.3 kg / 7.28 lb				4.1 kg / 9.04 lb					
	Light+Adapter	3.83 kg / 8.53 lb				4.82 kg / 10.63 lb					
Illumination[Lux]											
Model		MixPanel 60					MixPanel 150				
Distance		1M	2M	3M	4M	5M	1M	2M	3M	4M	5M
2700K		4756 lux 442 fc	1290 lux 120 fc	596 lux 55 fc	345 lux 32 fc	228 lux 21 fc	10360 lux 966 fc	2869 lux 268 fc	1327 lux 124 fc	768 lux 72 fc	507 lux 47 fc
3200K		5438 lux 505 fc	1485 lux 138 fc	690 lux 64 fc	395 lux 37 fc	261 lux 24 fc	12330 lux 1150 fc	3401 lux 317 fc	1557 lux 145 fc	904 lux 84 fc	600 lux 56 fc
5600K		5844 lux 543 fc	1574 lux 146 fc	729 lux 68 fc	422 lux 39 fc	279 lux 26 fc	13880 lux 1294 fc	3731 lux 348 fc	1746 lux 163 fc	1007 lux 94 fc	663 lux 62 fc
7500K		5695 lux 529 fc	1534 lux 143 fc	707 lux 66 fc	410 lux 38 fc	271 lux 25 fc	13280 lux 1238 fc	3604 lux 336 fc	1641 lux 153 fc	957 lux 89 fc	633 lux 59 fc
R		1600 lux 149 fc	429 lux 40 fc	198 lux 18 fc	116 lux 11 fc	77 lux 7 fc	2841 lux 265 fc	758 lux 71 fc	347 lux 32 fc	203 lux 19 fc	135 lux 13 fc
G		3613 lux 336 fc	958 lux 89 fc	444 lux 41 fc	259 lux 24 fc	174 lux 16 fc	6111 lux 570 fc	1640 lux 153 fc	758 lux 71 fc	444 lux 41 fc	296 lux 28 fc
B		690 lux 64 fc	185 lux 17 fc	85 lux 8 fc	50 lux 5 fc	33 lux 3 fc	1240 lux 116 fc	330 lux 31 fc	152 lux 14 fc	89 lux 8 fc	60 lux 6 fc

PavoTube

PavoTube RGBWW LED Tube Light



Wireless App Control



Wireless Remote Control



PavoTube II 6C *Limitless Colors · Effortless Load*



Hue Loop



CCT Loop



Int Loop



Flash



Pulse



Storm



Police Car



TV



Candle/Fire



Disco



Bad Bulb



Paparazzi



Firework



Explosion



Welding

1. 10in 6W RGBWW LED tube with internal battery, perfect for creating linear lighting sources.
2. Wider CCT from 2700K-7500K with advanced G & M adjustments.
3. HSI mode with 36000 colors options and 15 practical effects.
4. Built-in magnets and 1/4-20 mounts at both ends.
5. A USB Type-C port for charging and future firmware updates.
6. Control : On-board controller, 2.4G.



Standard Configuration

PavoTube II 6C × 1, Metal Plate × 3, USB Type-C Cable × 1, Safety Strap × 1, Carrying Bag × 1

Accessories(Optional)



BT-BG-F550 Battery grip



AS-BH-1/4 Mini Ball Head



AS-CP-1/4 Coupler



AS-MS-C Mini Super Clamp



EC-PTII6C Eggcrate



Carrying Bag for Tube Kit






AS-WB-PTII6C Waterproof bag



AS-MT/HG-1/4 Mini Tripod & Hand Grip with 1/4 screw



HD-T12+BH T12 Tube Holder with Mini Ball Head

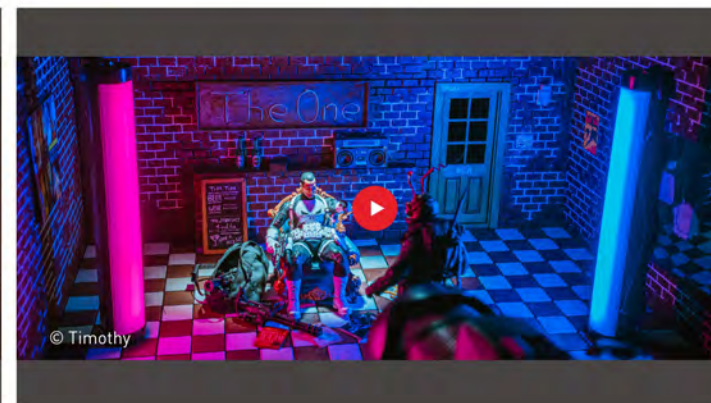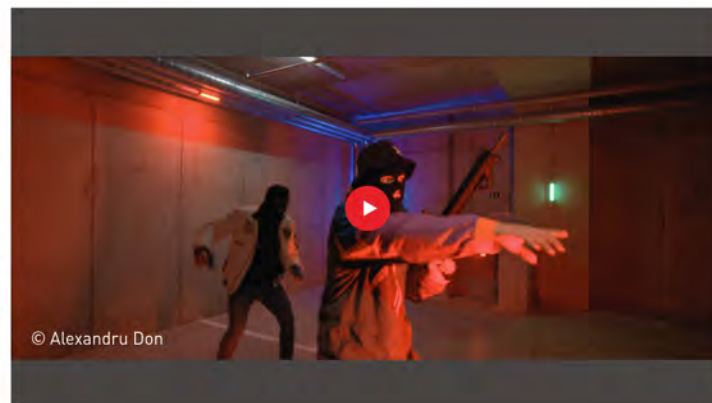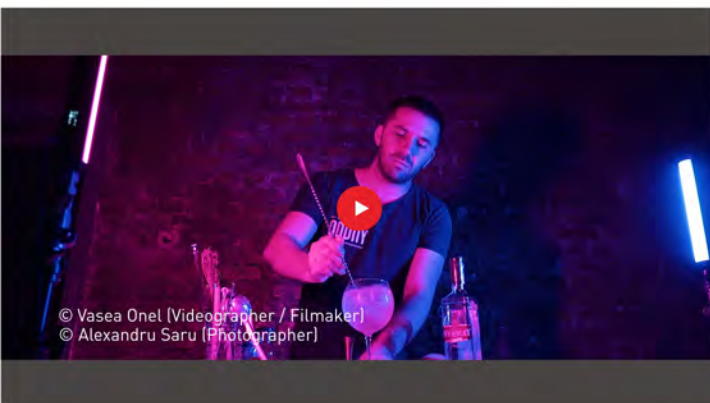

PavoTube 15C/30C

WiderCCT
2700-6500K

Build-in battery
Last for 2-3 hours

HSI/SAT
36000 kinds of hues

Specifical Effects
Storm, Cop Car Etc.

Cop Car

Flash

Storm

Candle Light

HSI

CCT

RGB Cycle

© wesperryphoto

© András Deák

© Sándor Bodogán

Innovative OLED Screen

Easily Controllable

Hexagonal Structure

Instruction

PavoTube 15C

770mm / 2 feet

PavoTube 30C

1170mm / 4 feet

Accessories(Optional)

NanLink Lighting Control System

CB-T-MS Master-slave Cable

CB-DT/DC D-TAP Cable with DC socket

CB-DC-1/2 1/2DC Power Cable

RC-1 Remote Controller

PavoTube Kit

The PavoTube is sold in kit which have 1kit, 2kit, 4kit available.
Provide more possibility for your different shooting requirement.

HD-T12-4-BHG

HD-T12-2-BHG

HD-T12-4-P

HD-T12-2-P

HD-T12-1-BHP

HD-T12-1-CP

HD-T12-1-LA

NOTE: All the tube holders are compatible with PavoTube II 6C and PavoTube 15C/30C.

Standard Configuration

PavoTube 15C KIT			PavoTube 30C KIT		
1 KIT	2 KIT	4 KIT	1 KIT	2 KIT	4 KIT
PavoTube 15C × 1	PavoTube 15C × 2	PavoTube 15C × 4	PavoTube 30C × 1	PavoTube 30C × 2	PavoTube 30C × 4
Power adapter × 1	Power adapter × 1	Power adapter × 2	Power adapter × 1	Power adapter × 1	Power adapter × 2
T12 Clip × 1	T12 Clip × 2	T12 Clip × 4	T12 Clip × 1	T12 Clip × 2	T12 Clip × 4
Carrying bag × 1	Carrying bag × 1	Carrying bag × 1	Carrying bag × 1	Carrying bag × 1	Carrying bag × 1
Hanging cable × 2	Hanging cable × 4	Hanging cable × 8	Hanging cable × 2	Hanging cable × 4	Hanging cable × 8
/	Master slave cable × 1	Master slave cable × 3	/	Master slave cable × 1	Master slave cable × 3
/	1/2DC Power cable × 1	1/2DC Power cable × 2	/	1/2DC Power cable × 1	1/2DC Power cable × 2

17

18



BD-PT15C+EC/BD-PT30C+EC

Barndoor with eggcrate for PavoTube

Control and shape light, achieve more creative uses.



Dimension: 58.5cm / 1.9ft
98.5cm / 3.2ft
Weight: about 0.95kg / 2lb



HD-T12-CK DIY Tube Holder

Creative DIY Tube light Holder, provide you more possibility.



Configuration:
2 in 1 Tube Holder x 2
Aluminous Pole 395mm x 2
Tube Holder x 4

PavoTube Technical Data													
Model	PavoTube 15C			PavoTube 30C					PavoTube III 6C				
LED total power	16W x 5			30W x 5					6W x 5				
Input voltage/current	DC15V/2A Max, AC100-240V 50/60Hz			DC15V/4A Max, AC100-240V 50/60Hz					DC5V/2A (Optional)				
CRI	Average 95			Average 95					Average 95				
TLCI	Average 95			Average 95					Average 97				
CCT	2700K - 6500K			2700K - 6500K					2700K - 7500K (G/M adjustment)				
Dimming	0 to 100 % continuous			0 to 100 % continuous					0 to 100 % continuous				
Control	On-board controller, 2.4G			On-board controller, 2.4G					On-board controller, 2.4G				
Special Effect	Cop Car, Flash, Storm, Candle Light			Cop Car, Flash, Storm, Candle Light					Hue Loop, CCT Loop, INT Loop, CCT Flash, HUE Flash, CCT Pulse, Hue Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Wedding				
Product Size	770×48×48 mm / 30.31×1.89×1.89"			1170×48×48mm / 46.06×1.89×1.89"					250 × 39 × 38 mm / 9.84 × 1.54 × 1.47"				
Product Weight	0.8 kg / 1.76 lb			1.25 kg / 2.76 lb					0.26 kg / 0.57 lb				
Illumination(lux/fc)													
Model	PavoTube 15C			PavoTube 30C					PavoTube III 6C				
Distance	1M	2M	3M	1M	2M	3M	4M	5M	0.3M	0.5M	1M	2M	3M
2700K	375 lux 35 fc	99 lux 9 fc	46 lux 4 fc	633 lux 59 fc	194 lux 18 fc	101 lux 9 fc	63 lux 6 fc	45 lux 4 fc	1361 lux 126 fc	599 lux 56 fc	148 lux 14 fc	37 lux 3 fc	17 lux 2 fc
6500K	430 lux 40 fc	117 lux 11 fc	53 lux 5 fc	719 lux 67 fc	209 lux 19 fc	111 lux 10 fc	70 lux 7 fc	50 lux 5 fc	1540 lux 143 fc	694 lux 64 fc	170 lux 16 fc	43 lux 4 fc	20 lux 2 fc
R	157 lux 15 fc	41 lux 4 fc	19 lux 2 fc	251 lux 23 fc	82 lux 8 fc	43 lux 4 fc	30 lux 3 fc	23 lux 2 fc	654 lux 61 fc	284 lux 26 fc	70 lux 7 fc	18 lux 2 fc	8 lux 1 fc
G	383 lux 37 fc	101 lux 9 fc	47 lux 4 fc	663 lux 62 fc	210lux 20 fc	109lux 20 fc	66 lux 6 fc	48 lux 4 fc	1462 lux 136 fc	632 lux 59 fc	159 lux 15 fc	39 lux 4 fc	19 lux 2 fc
B	60 lux 6 fc	16 lux 1 fc	7 lux 1 fc	103 lux 10 fc	38 lux 6 fc	23 lux 2 fc	17 lux 2 fc	13 lux 1 fc	286 lux 27 fc	122 lux 11 fc	30 lux 3 fc	7 lux 1 fc	4lux 0.4 fc

MIX Series RGB Light

Compact and Portable Design,
Three Light Sources in ONE Fixture, Special Lighting Effects.



POLICE CAR FLASH STORM RGB CYCLE



Wireless App Control Wireless Remote Control

© Jia Yunlong

MixWand 18II RGBWW LED Wand Light

Main Features

1. Three Lights in ONE wand: Tunable RGB, adjustable 30°/45° luminous surface with warm and cold light
2. Combines an advanced SMD Lens technology design with increased light output.
3. Build in flash and color cycle mode in the handheld wand to create different changing shooting effects, expand more possibilities.
4. With improved housing and compact handheld design the MixWand 18II is perfect for light painting, photography lighting and video production.
5. Optimized for use in the studio or on location, the MixWand 18II can run off either the included power adapter or the NP-F series batteries (Not Included).
6. The optional barndoor, make it easy to control over the shape and direction of the light.

Standard Configuration

Light×1, Power Adapter (Power cable 2M with DC plug) ×1,
Power Adapter Connector Plug×1,Safety Strap×1



Details



Control Panel Safety Strap Sony NP-F Style Battery Plate 1/4 20" Receiver Mount Power Adapter

Accessories(Optional)



BD-MW118 Barndoor NanLink Lighting Control System NP-F Battery CN-58 2 in 1 Charger

MixPad 27 · MixPad 11

Bicolor soft light | Bicolor hard light | RGB light



© Julius Bocklin

Main Features

- 1. Studio Quality Lighting: NANLITE MixPad series LED panels create bright, color accurate studio lighting with minimal set up and complications. Perfect for live streaming, vlogging, photography, video and more.
- 2. Three lighting sources in one: basic bi-color of hard light, soft light, tuneable RGB lighting.
- 3. Special lighting effect of color cycle and flash, perfect for video production.
- 4. Dual power support: can be powered by NP-F750 or AC power adapter to use on location as well as in studio. Its compact size allows you to pack it in your bag and go shoot anywhere.

Standard Configuration

MixPad 27: Light x 1, Power adapter x 1

MixPad 11: Light x 1

Accessories[Optional]



NanLink Lighting Control System



NP-F Battery



CN-58 2 in 1 Charger

Details



Power/ Light Source Switch



Sony NP-F Style Battery Plate



MixPad 11

MixPad 27

Mix Technical Data

Model	MixPad 27	MixPad 11	MixWand 18	MixWand 18II
LED Total Power	27W	11W	18W	
Input Voltage/Current	DC15V/3A Max, AC100-240V 50/60Hz	DC15V/1.6A Max, AC100-240V 50/60Hz		
CRI	Average 95			
TLCI	Average 95			
CCT	3200K - 5600K			
Dimming	0 to 100 % continuous			
Control	On-board controller, 2.4G			
Product Size	348 × 308 × 60 mm 13.70 × 12.13 × 2.36"	178 x 168 x 35 mm 7.01 × 6.61 × 1.38"	590 x 67 x 36 mm 23.23 × 2.64 × 1.42"	590 × 67 × 36.8 mm 23.23 × 2.64 × 1.49"
Product Weight	1.48 kg / 3.26 lb	0.42 kg / 0.93 lb	0.87 kg / 1.92 lb	0.49 kg / 1.08 lb

Illumination[lux /fc]													
Model	MixPad 27			MixPad 11			MixWand 18			MixWand 18II			
Distance	1M	2M	3M	1M	2M	3M	1M	2M	3M	Distance	1M	2M	3M
3200K (SMD)	433 lux 40 fc	102 lux 10 fc	48 lux 5 fc	93 lux 9 fc	24 lux 2 fc	11 lux 1 fc	128 lux 12 fc	32 lux 3 fc	15 lux 1 fc	3200K [30°]	2390 lux 222 fc	694 lux 64 fc	322 lux 30 fc
5600K (SMD)	445 lux 41 fc	108 lux 10 fc	49 lux 5 fc	107 lux 10 fc	27 lux 3 fc	13 lux 1 fc	128 lux 12 fc	32 lux 3 fc	16 lux 1.5 fc	5600K [30°]	2760 lux 256 fc	807 lux 75 fc	377 lux 35 fc
3200K (LED bulb)	1757 lux 163 fc	436 lux 41 fc	190 lux 18 fc	471 lux 44 fc	134 lux 12 fc	59 lux 5 fc	960 lux 89 fc	244 lux 23 fc	108 lux 10 fc	3200K [45°]	1460 lux 136 fc	405 lux 38 fc	185 lux 17 fc
5600K (LED bulb)	2188 lux 203 fc	522 lux 49 fc	230 lux 21 fc	603 lux 56 fc	153 lux 14 fc	69 lux 6 fc	1108 lux 103 fc	280 lux 26 fc	128 lux 12 fc	5600K [45°]	1740 lux 162 fc	471 lux 44 fc	213 lux 20 fc
R	487 lux 45 fc	122 lux 11 fc	53 lux 5 fc	179 lux 17 fc	44 lux 4 fc	20 lux 2 fc	138 lux 13 fc	35 lux 3 fc	17 lux 1.6 fc	R	321 lux 30 fc	89 lux 8 fc	42 lux 4 fc
G	1184 lux 110 fc	282 lux 26 fc	130 lux 126 fc	374 lux 35 fc	97 lux 9 fc	44 lux 4 fc	283 lux 26 fc	72 lux 7 fc	34 lux 3 fc	G	600 lux 56 fc	163 lux 15 fc	75 lux 7 fc
B	216 lux 20 fc	53 lux 5 fc	24 lux 2 fc	82 lux 8 fc	19 lux 2fc	9 lux 0.8 fc	65 lux 6 fc	16lux 1fc	7lux 0.7fc	B	174lux 16fc	48lux 4fc	22lux 2fc

Atmosphere Rendering and Creative Light Painting

MixWand 18II can be utilized for various colorful atmosphere rendering and fantastic creative light painting with the design of being able to switch between 3 lighting modes with a button and the build-in special effect.

Creative Photography

handheld fill light for light painting. 360 kinds of colors can be switched at ease or loop automatically.





Video Production

atmosphere heightening, scene simulation.



Main lighting fixture: MixWand 18II

1. Model
2. MixWand 18II
3. Mixpad 27
4. Mixpad 27
5. Camera

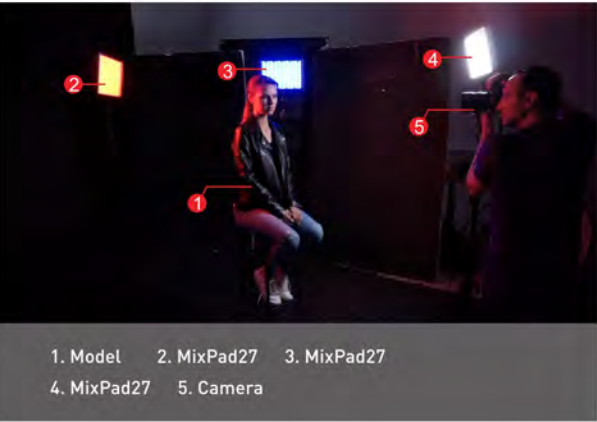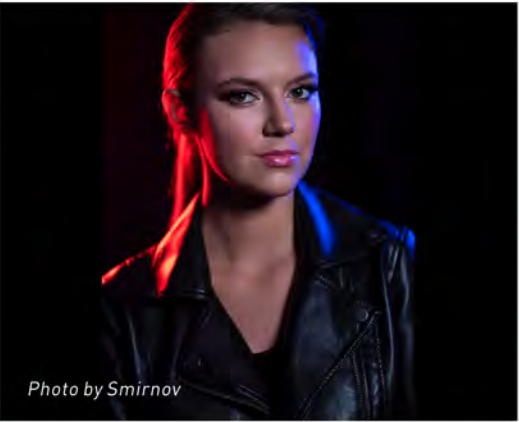

1. Model
2. MixPad27
3. MixPad27
4. MixPad27
5. Camera

MixKIT

Complete portability, compact size, portable to use both on location and indoor.
Utility in your creative work.

MixPad 11 3KIT

- MixPad 11 x 3
- Power adapter x 3
- Carrying bag x 1
- LS-170-5/8 Light stand x 3 (Optional)



MixPad 27 3KIT

- MixPad 27 x 3
- Power adapter x 3
- Plastic carrying bag x 1
- LS-170-5/8 Light stand x 3 (Optional)



LumiPad Series Soft Panel

Bi-color, Slim Design, High Output, High CRI



LumiPad 11/25

The LumiPad series LED panels combine compact design and impressive brightness making them an ideal option for live streaming, vlogging, photography lighting, video lighting, photo booths and more.

1. Edge lit fixture for soft light output.
2. Adjustable color temperature [3200K -5600K]. High CRI and good light quality.
3. Mounting options:
LumiPad 11: 1/4 20" mount and Cold Shoe
LumiPad 25 : 5/8" receiver.
4. Power options:
Run with either the AC power adapte or optional battery via its NP-F battery plate.

Standard Configuration

LumiPad 11: LED pad light x 1
LumiPad 25: LED pad light x 1, 15V2A Power Adapter x 1

Accessories(Optional)

Tripod &handle, Battery & Charger



LumiPad 25



LumiPad 11

LumiPad Lighting kit

Portable and powerful lighting kit,
provide a quick and easy lighting solution to meet more shootings.

Lumipad 25 2KIT

LumiPad 25 x 2, LS-170-5/8 x 2, Light handle x 2,
Power adapter x 2, Carrying bag x 1

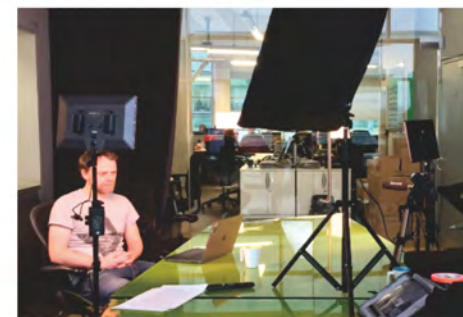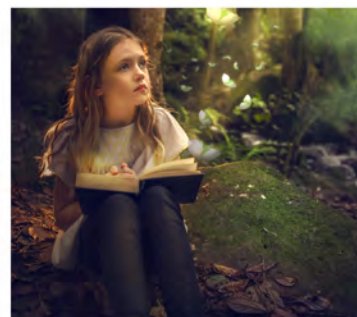

LumiPad Technical Data								
Model	LumiPad 11				LumiPad 25			
LED Total Power	11.5W				25W			
Input Voltage/Current	7.2-15V DC, NP-F series battery				15-24V DC, NP-F series battery			
CRI	95				95			
TLCI	93				93			
CCT	3200K - 5600K				3200K - 5600K			
Dimming	0 to 100 % continuous				0 to 100 % continuous			
Control	On-board controller, 2.4G				On-board controller			
Product Size	165 x 165 x 35mm / 6.5 x 6.5 x 1.38"				310 x 345 x 55mm / 12.2 x 13.6 x 2.17"			
Product Weight	0.25kg / 0.55lb				1.01kg / 2.23lb			
Illumination(Lux)								
Model	LumiPad 11				LumiPad 25			
Distance	0.5M	1M	2M	3M	0.5M	1M	2M	3M
3200K	1273 lux / 118 fc	320 lux / 30 fc	76 lux / 7 fc	36 lux / 3 fc	3457 lux / 321fc	867 lux / 81fc	216 lux / 20 fc	97 lux / 9 fc
5600K	1278 lux / 119 fc	337 lux / 31 fc	75 lux / 7 fc	39 lux / 4 fc	3570 lux / 332 fc	930 lux / 86 fc	232 lux / 22fc	104 lux / 10fc



COMPAC Series LED Studio Light

Combines a slim profile with an impressive output to create lighting similar to large softboxes but at a fraction of the size. It is an ideal option for lighting portraits, interviews, head shots, live streaming, food photography, vlogging, product photography, and more.

COMPAC Series LED Studio Light

The Compac series comes in 6 sizes in different power outputs from 20W to 200W, with daylight and bi-color versions to meet your different shooting requirements.




Daylight	Compac 200	Compac 100	Compac 68	Compac 40	Compac 24	Compac 20
Bi-color	Compac 200B	Compac 100B	Compac 68B	Compac 40B	Compac 24B	

Compac Technical Data												
Model	Compac 20		Compac 24/24B		Compac 40/40B		Compac 68/68B		Compac 100/100B		Compac 200/200B	
LED Total Power	20W		24W		40W		68W		100W		200W	
Input Voltage/Current	100-240V AC											
CRI	95											
TLCI	93											
CCT	5600K		5600K / 3200K - 5600K									
Dimming	NO		0 - 100 % continuous									
Control	On-board controller										On-board controller, 2.4G	
Product Size	205 x 140 x 40 mm 8.1 x 5.5 x 1.6"		316 x 172 x 75 mm 12.4 x 6.8 x 3"		408 x 232 x 80 mm 16.1 x 9.1 x 3.2"		566 x 350 x 90 mm 22.3 x 13.8 x 3.5"		664 x 400 x 85 mm 26.1 x 15.7 x 3.3"		818 x 500 x 105 mm 32.2 x 19.7 x 4.1"	
Product Weight	0.35 kg / 0.77 lb		0.72kg / 1.59lb		1.3 kg / 2.87 lb		2.5 kg / 5.51 lb		3.3 kg / 7.28 lb		6 kg / 13.2 lb	
Illumination[Lux]												
Model	Compac 20		Compac 24/24B		Compac 40/40B		Compac 68/68B		Compac 100/100B		Compac 200/200B	
Distance	5600K		3200K	5600K	3200K	5600K	3200K	5600K	3200K	5600K	3200K	5600K
1M	420		- / 670	716 / 690	- / 1450	1255 / 1540	- / 2263	2052 / 2245	- / 2744	3274 / 2862	- / 4299	4960 / 4751
2M	105		- / 156	187 / 168	- / 345	343 / 367	- / 554	540 / 554	- / 704	886 / 731	- / 1208	1359 / 1224
3M	56		- / 69	84 / 74	- / 150	157 / 163	- / 248	245 / 245	- / 314	396 / 392	- / 551	616 / 553

Main Features

1. Combining a space-saving design with impressive output, achieves lighting similar to a large softbox but at a fraction of the size and none of the set up time.
2. Quickly achieve beautiful, studio-quality results without adding plastic filters or cloth diffusion. Rear controls enable you to dial in brightness from 0-100%.
3. Multiple Lighting modifiers, allowing you to control the lighting of Compac more easily.

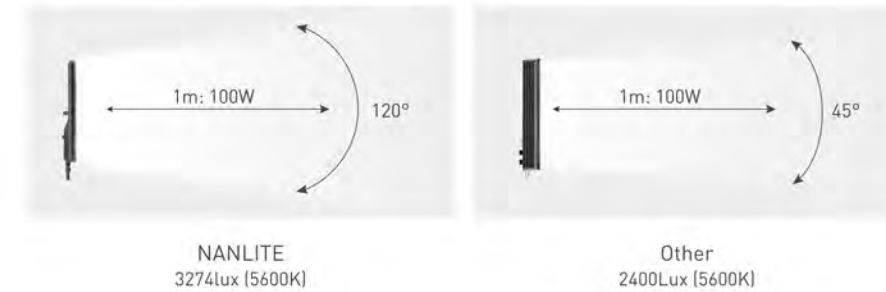

Standard Configuration

Light x 1, Power cable x 1

Lighting Modifiers (Optional)

Round Softbox / Lantern Softbox for Compac 200/200B/100/100B/68/68B

Providing a softer, more evenly and larger fill light solution with the softbox.

Eggcrate for 200/200B/100/100B

Providing directional control of the output, keeps light off the background, and allows you to light specific areas of your subject.



Live Stream Lighting Kit

Recommended space: 12-18m²

LitoLite 28F x 1
Compac 100B +LT-CP100-R x 1
Compac 100B+ SB-CP100-R x 1
halo 18 x 1



Compac 20 2KIT

Compac 20 LED studio light x 2
Folding photo table x 1
Background papers x 1
Adjustable bracket x 2
LS-DT-5/8 Light stand x 2
Connecting base x 2
Carrying bag x 1



Compac 100 4KIT+T

with green background whole set

Compac 100 LED studio light x 4
Power cable x 4
LS-288-5/8 Light stand x 4
U shape background x 1
Frame x 1
Green cloth x 1



Compac 20 3KIT

Compac 20 LED studio light x 3
Folding photo table x 1
Background papers x 1
Adjustable bracket x 3
LS-DT-5/8 Light stand x 2
Connecting base x 3
Carrying bag x 1
LS-60-5/8 Light stand x 1



NOTE: More lighting setup solutions for live-streaming, please visit www.nanlite.com.

LitoLite Series Focusable Light

Powerful Output, Compact Design, Flood and Spotlight Adjustment



1. Powerful and compact LED lights for use on a camera, tripod, or light stand.
2. Offer adjustable, flicker-free, light output with flood and spotlight adjustment.
3. High efficient LED COB with high CRI and standard color temperature.
4. Perfect portable lights are ideal for interview lighting, wedding and event photography / videography, studio lighting, and more.

Standard Configuration

LitoLite 8F:

Light x 1, Filter x 2, Barndoor x 2,
Frame for French Cokin filter x 1,
AA Battery box x 1

LitoLite 10FB:

Light x 1, Filters x 2, Carrying bag x 1,
Battery box x 1

LitoLite 28F:

Light x 1, 15V 2.4A power adapter x 1
Carrying bag x 1, Barndoor x 1, Fliter x 1

Accessories(Optional)



BT-SNP-6AA
6AA NP-F Style Battery Adapter
for LitoLite8F/10FB

BT-BA-SNP/DC
Sony NP Battery adapter with
DC socket for LitoLite 28F

Battery



LitoLite 8F

LitoLite 10FB

LitoLite 28F

LitoLite Technical Data

Model	LitoLite 8F	LitoLite 10FB	LitoLite 28F
LED Total Power	8W	10W	28W
Input Voltage/Current	7.2-12V DC	7.2-12V DC	DC15V/2.4A Max, AC100-240V 50/60Hz
CRI	95	98	95
CCT	5600K	3200K - 5600K	5600K
Dimming	0 to 100 % continuous	0 to 100 % continuous	0 to 100 % continuous
Control	On-board controller	On-board controller	On-board controller
Product Size	170 x 150 x 80mm / 6.7 x 5.9 x 3.1"	105 x 125 x 140 mm / 4.1 x 4.9 x 5.5"	118.5 x 92 x 162 mm / 4.67 x 3.62 x 6.38"
Product Weight	0.3kg / 0.7lb	0.36 kg / 0.8 lb	0.61kg / 1.34lb

Illumination[lux /fc]

Model	LitoLite 8F		LitoLite 10FB				LitoLite 28F	
CCT	5600K		5600K		3200K		5600K	
Distance	Spot 10°	Flood 60°	Spot 15°	Flood 55°	Spot 15°	Flood 55°	Spot 20°	Flood 50°
1M	4790 lux 445fc	646 lux 60 fc	8503 lux 790 fc	1047 lux 97 fc	5523 lux 513 fc	738 lux 69 fc	4656 lux 433 fc	1544 lux 143 fc
2M	1005 lux 93 fc	155 lux 14 fc	2067 lux 192 fc	235 lux 22 fc	1337 lux 124 fc	175 lux 16 fc	1073 lux 100 fc	376 lux 35fc
3M	423 lux 39 fc	67 lux 6.2 fc	931 lux 87 fc	101 lux 9 fc	573 lux 53 fc	75 lux 7 fc	462 lux 43 fc	160 lux 15 fc



halo Series Ring Light

Soft ring light, high brightness with soft light
Create “diamond” ring in your eyes

Photo by Phil Stevens



Perfect for portrait photography, video production, wedding photography, vlogging, cosmetology, hair dressing, still life shooting, makeup tutorial and more.


NANLITE ring lights offer optional accessories, for more professional lighting solutions.

- Desktop Light Stand
- Carrying Bag
- AS-Bracket-P Phone Bracket
- AS-Mirror-7 Mirror
- AS-Mirror-8 Mirror
- AS-Bracket-C Camera Bracket
- Light Stand
- Battery

halo10B NEW

Main Features

1. Compact size of 10 inch diameter makes it as the ideal choice for working in small place.
2. With smart touch switch, ensure for silent operation.
3. With standard USB cable, allowing you to utilize any USB fast charger or power bank to power the light.
4. An innovative rotating phone bracket and mirror, makes finding the perfect angle quick and convenient.

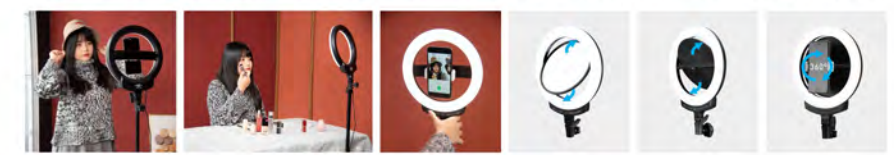

Standard Configuration

halo10B x 1, Mirror x1, Phone bracket x1, Carrying bag x 1



Mira 26B NEW

Dimmable Bi-color Beauty Light with Dual Flex Arms and USB Power Passthrough.



Standard Configuration

Mira 26B x 1, AC Adapter x 1, Phone Bracket x1, Carrying Bag x1



halo 16C

Innovative colorful beauty lighting.

Main Features

- 1. Three lighting modes available, soft bi-color and tunable RGB Light, creative shooting scenes.
- 2. Special lighting effect of color cycle and flash mode, creating a distinctive vision in your shoot.
- 3. Intelligent touch switch, operating silently and easily.



Standard Configuration

Ring light x 1, Mirror x 1, Phone bracket x 1, Power adapter x 1, Power cable x 1



halo Technical Data

Model	halo10B	Mira 26B	halo16C
LED Total Power	9.6W x2	26W x 2	28W
Input Voltage/Current	DC 5V	DC15V2.4A, AC110-240V	15V DC, 100-240V AC
CRI	95	95	95
CCT	2700K - 6500K	2700K - 6500K	2700K - 6500K
Dimming	0-100% by touch switch	0 to 100 % continuous	0 to 100 % continuous
Control	On-board controller	On-board controller, 2.4G	On-board controller, 2.4G
Product Size	254mm (out-diameter), 190mm (in-diameter) 10" (out-diameter), 7.5" (in-diameter)	690 x 118 x 53mm 27.2 x 4.7 x 2.1"	406.2mm (out-diameter), 312.8mm (in-diameter) 16" (out-diameter), 12.3" (in-diameter)
Product Weight	0.43kg / 0.95lb	0.84 kg / 1.86 lb	1.92kg 4.2lb

Illumination(lux /fc)

Model	halo10B		Mira 26B				halo16C				
Distance	2700K	6500K	2700K	3200K	5600K	6500K	2700K	6500K	R	G	B
1M	197 lux 18 fc	193 lux 18 fc	660 lux 56 fc	609 lux 57 fc	631 lux 59 fc	664 lux 62 fc	456 lux 42.38 fc	490 lux 45.54 fc	171 lux 15.59 fc	280 lux 26.02 fc	84 lux 7.81 fc
2M	51 lux 5 fc	47 lux 4 fc	148 lux 14 fc	153 lux 14 fc	162 lux 15 fc	170 lux 16 fc	126 lux 11.71 fc	124 lux 11.52 fc	46 lux 4.28 fc	75 lux 6.97 fc	22 lux 2.04 fc
3M	23 lux 2 fc	22 lux 2 fc	81 lux 8 fc	83 lux 8 fc	85 lux 8 fc	86 lux 8 fc	59 lux 5.48 fc	59 lux 5.48 fc	22 lux 2.04 fc	36 lux 3.35 fc	11 lux 1.02 fc

halo 14U

Built-in battery can run at full power for 1.5 hours, easy to use indoor and outdoor.
With the USB port for you to power the light by power bank while
you are doing long time vlogging or streaming.

Standard Configuration

- Ring light x 1
- Mirror x 1
- Phone bracket x 1
- Power adapter x 1
- USB cable x 1



halo 16

The halo 16 can be powered by either an AC adapter or a Sony NP-F style battery(optional).
Also with the USB power pass through port you can charge smartphones and
other devices for live streaming, vlogging, timelapses and more.



Digital Screen USB Port

Standard Configuration

- Standard Configuration
- Ring light x 1
 - Mirror x 1
 - Phone bracket x 1
 - Power adapter x 1
 - Power cable x 1



halo *Technical Data*

Model	halo 14U (Built-in battery)	halo 16
LED Total Power	16.8W	29W
Input Voltage/Current	12-16.8V DC; 100-240V AC	12-18V DC; NP-F series battery
CRI	95	95
CCT	2700K - 6500K	3200K - 5600K
Dimming	0 to 100 % continuous	0 to 100 % continuous
Control	On-board controller	On-board controller, 2.4G
Product Size	343mm (out-diameter), 279.4mm (in-diameter) 13.5" (out-diameter), 11" (in-diameter)	400mm (out-diameter), 305mm (in-diameter) 15.7" (out-diameter), 12" (in-diameter)
Product Weight	1.46kg / 3.21lb	0.95kg / 2.09lb

Illumination(lux /fc)

Model	halo 14U (Built-in battery)				halo 16	
Distance	2700K	3200K	5600K	6500K	3200K	5600K
1M	255lux / 24fc	281lux / 26fc	308lux / 19fc	315lux / 29fc	470lux / 44fc	487lux / 45fc
2M	64lux / 6fc	76lux / 7fc	86lux / 8fc	80lux / 7fc	146lux / 14fc	155lux / 14fc
3M	26lux / 2fc	36lux / 3fc	41lux / 4fc	35lux / 3fc	78lux / 7fc	86lux / 8fc

halo 18 / halo 14

Classic hot sale ring lights, 2 sizes (18/14 inch) for your different demands.
Soft lighting, Bi-color, High CRI, easy to set up!

Standard Configuration

- Ring light x 1
- Mirror x 1
- Phone bracket x 1
- Power cable x 1



halo 19

19"big size, standard 5600K,
High CRI with traditional LED, powerful enough to be used as
a studio light or even outdoors.

Standard Configuration

- Ring light x 1, Soft filter x 1, Spring tube x 1
- Power adapter x 1, Power cable x 1



Accessories(Optional)

- Plastic Filter



halo

Technical Data

Model	halo 18				halo 14				halo 19
LED Total Power	48W				24W				38W
Input Voltage/Current	100-240V AC				100-240V AC				12-16.8V DC; 100-240V AC
CRI	95				95				95
CCT	2700K - 6500K				2700K - 6500K				5600K
Dimming	0 to 100 % continuous				0 to 100 % continuous				0 to 100 % continuous
Control	On-board controller				On-board controller				On-board controller
Product Size	456mm (out-diameter), 305mm (in-diameter) 18.3" (out-diameter), 12" (in-diameter)				345mm (out-diameter), 265mm (in-diameter) 13.6" (out-diameter), 10.4" (in-diameter)				485mm (out-diameter), 365mm (in-diameter) 19.1" (out-diameter), 14.4" (in-diameter)
Product Weight	1.55kg / 3.41lb				0.65kg / 1.43lb				1.54kg / 3.39lb
Illumination(lux /fc)									
Model	halo 18				halo 14				halo 19
Distance	2700K	3200K	5600K	6500K	2700K	3200K	5600K	6500K	5600K
1M	822 lux 76 fc	860 lux 80 fc	988 lux 92 fc	984 lux 91 fc	283 lux 26 fc	291 lux 44 fc	324 lux 45 fc	323 lux 30 fc	5800 lux 539 fc
2M	208 lux 19 fc	241 lux 23 fc	280 lux 16 fc	267 lux 25 fc	75 lux 7 fc	79 lux 14 fc	92 lux 14 fc	91 lux 8 fc	1660 lux 154 fc
3M	100 lux 9 fc	134 lux 13 fc	134 lux 13 fc	125 lux 12 fc	33 lux 3 fc	37 lux 7 fc	42 lux 8 fc	41 lux 4 fc	734 lux 68 fc



D672II & D672BII Professional LED Studio Light

The new upgraded D672II & D672BII are pro standard studio lights which provides ultra soft light, high output and accurate color with a CRI of 95. Compatible with 2.4G and DMX control, making them the perfect solution for studio, broadcast, live streaming and more.



Standard Configuration

D672II / D672BII LED light x 1, Power cable x 1



SA Technical Data

Model	D672II	D672BII	
LED Total Power	148W	148W x 2	
Input Voltage/Current	110-220V AC	110-220V AC	
CRI	95	95	
TLCI	93	93	
CCT	3200K / 5600K	3200K - 5600K	
Dimming	0 to 100 % continuous	0 to 100 % continuous	
Control	On-board controller, 2.4G, DMX	On-board controller, 2.4G, DMX	
Product Size	581 x 442 x 93mm / 22.9 x 17.4 x 3.7"	581 x 442 x 93mm / 22.9 x 17.4 x 3.7"	
Product Weight	8kg / 17.6lb	8kg / 17.6lb	

Illumination(lux /fc)

Model	D672II	D672BII	
Distance	5600K	3200K	5600K
1M	2717lux / 253fc	2381lux / 221fc	2671lux / 248fc
2M	777lux / 72fc	692lux / 64fc	747lux / 69fc
3M	380lux / 35fc	337lux / 31fc	363lux / 34fc

SA/DSA Series LED Studio Light

Main Features

1. Perfect for budget minded shooters and anyone just getting started with constant lights, the SA Series LED panels combine lightweight ABS housings with impressive brightness to make a fixture perfect for live streaming, vlogging, photography lighting, video lighting, interview setups and more.
2. With dimming from 0-100% and included barndoor, the SA Serie's output can be quickly shaped and adjusted. Rear controls enable you to dial in brightness from 0-100% and temperature from warm to cold (3200K-5600K) on bicolor models.
3. Optimized for use in the studio or on location. Choose from multiple power options including the AC adapter or compatible V-mount batteries (sold separately).
4. DMX ready versions are also available for easy adoption into any DMX controlled workflow.

Standard Configuration

Light with barndoor x 1, Carrying Bag x 1, Power Adapter x 1, Filter x 3

Accessories(Optional)



NOTE:
Daylight & Bi-color Version:
600/900/1200SA and 600/900/1200CSA (Wirelessly controlled via 2.4G)
Daylight Version:
600/900/1200DSA [Control via 2.4G/DMX]



600/900/1200SA 3KIT+T

Basic 3 lighting kit solution, with the trolley carrying bag,
very light-weight and portable.
Perfect for interview, weddings, studio,
live streaming indoor and outdoor solution.

Standard Configuration

600SA/CSA or 900SA/CSA or 1200SA/CSAx3
LS-186-5/8 light stand x3
Power adapter x 3
Filter x 3
CC-ST-85 trolley case x 1



SA Technical Data						
Model	600CSA		900CSA		1200CSA	
LED Total Power	36W		54W		72W	
Input Voltage/Current	14.8V DC; 100-240V AC, Sony V-lock battery		14.8V DC; 100-240V AC, Sony V-lock battery		14.8V DC; 100-240V AC, Sony V-lock battery	
CRI	95		95		95	
TLCI	93		93		93	
CCT	3200K - 5600K		3200K - 5600K		3200K - 5600K	
Dimming	0 to 100 % continuous		0 to 100 % continuous		0 to 100 % continuous	
Control	On-board controller, 2.4G		On-board controller, 2.4G		On-board controller, 2.4G	
Product Size	345 x 385 x 90mm / 13.5 x 15.1 x 3.5"		420 x 375 x 90mm / 16.5 x 14.7 x 3.5"		470 x 380 x 90mm / 18.4 x 14.9 x 3.5"	
Product Weight	2.1kg / 4.6lb		2.4kg / 5.3lb		2.5kg / 5.7lb	
Illumination(lux /fc)						
Model	600CSA		900CSA		1200CSA	
Distance	3200K	5600K	3200K	5600K	3200K	5600K
1M	2280lux / 212fc	2526lux / 235fc	3356lux / 312fc	3464lux / 322fc	4900lux / 455fc	5060lux / 470fc
2M	595lux / 55fc	670lux / 62fc	860lux / 80fc	897lux / 83fc	1284lux / 119fc	1376lux / 128fc
3M	281lux / 26fc	311lux / 29fc	396lux / 37fc	415lux / 38.5fc	591lux / 55fc	625lux / 57fc
4M	162lux / 15fc	181lux / 17fc	233lux / 22fc	246lux / 23fc	340lux / 32fc	364lux / 34fc
5M	107lux / 10fc	119lux / 11fc	156lux / 15fc	169lux / 16fc	229lux / 21fc	243lux / 23fc

SA Technical Data						
Model	600SA / 600DSA		900SA / 900DSA		1200SA / 1200DSA	
LED Total Power	36W		54W		72W	
Input Voltage/Current	14.8V DC; 100-240V AC, Sony V-lock battery		14.8V DC; 100-240V AC, Sony V-lock battery		14.8V DC; 100-240V AC, Sony V-lock battery	
CRI	95		95		95	
TLCI	93		93		93	
CCT	3200K / 5600K		3200K / 5600K		3200K / 5600K	
Dimming	0 to 100 % continuous		0 to 100 % continuous		0 to 100 % continuous	
Control	On-board controller, 2.4G, DMX(Available for DSA series)					
Product Size	340 x 370 x 80mm 13.3 x 14.5 x 3.1"	375 x 343 x 87mm 14.7 x 13.4 x 3.4"	415 x 375 x 80mm 16.3 x 14.7 x 3.1"	395 x 415 x 85mm 15.5 x 16.3 x 3.3"	475 x 400 x 80mm 18.6 x 15.7 x 3.1"	470 x 380 x 85mm 18.4 x 14.9 x 3.3"
Product Weight	1.8kg / 4.0lb	2.1kg / 4.6lb	2.1kg / 4.6lb	2.4kg / 5.3lb	2.5kg / 5.5lb	2.5kg / 5.7lb
Illumination · 5600K (lux /fc)						
Model	600SA / 600DSA		900SA / 900DSA		1200SA / 1200DSA	
1M	5130lux / 477fc	4818lux / 448fc	7700lux / 716fc	8022lux / 746fc	9100lux / 846fc	9310lux / 866fc
2M	1350lux / 125.5fc	1242lux / 116fc	2040lux / 190fc	2090lux / 194fc	2400lux / 223fc	2490lux / 232fc
3M	620lux / 58fc	563lux / 52fc	930lux / 86fc	957lux / 89fc	1060lux / 98.5fc	1130lux / 105fc
4M	350lux / 32.5fc	386lux / 36fc	540lux / 50fc	526lux / 49fc	612lux / 67fc	726lux / 67fc
5M	230lux / 21fc	177lux / 16.5fc	350lux / 32.5fc	343lux / 32fc	400lux / 37fc	472lux / 44fc

Lighting Modifiers

Lighting modifier is the key to creating amazing images.

Each NANLITE lighting modifier is with their own effect on continuous light and provide more lighting effects possibilities.

Different size and style fit for your different requirements.

SoftBox Parabolic Forza-60

Item No.: SB-FZ60
Dimension: $\phi 58 \times 30\text{cm} / 22.83 \times 11.81\text{in}$
Weight: 1.24kg/2.73lb
Compatibility: NANLITE Forza 60
Fabric Eggcrate: EC-FZ60 (Optional)
Includes 2 diffusers: 1 and 2 Stops



SoftBox Parabolic 90 SoftBox Parabolic 90 (Easy up)

Item No.: SB-PR-90/ SB-PR-90Q
Dimension: $\phi 90 \times 63\text{cm} / 35.43 \times 24.80\text{in}$
Weight: 1.46kg/3.22lb
Compatibility: Bowens mount
Fabric Eggcrate: EC-PR90 (Optional)
Includes 2 diffusers: 1 and 2 Stops



SoftBox Parabolic 120 SoftBox Parabolic 120 (Easy up)

Item No.: SB-PR-120/ SB-PR-120Q
Dimension: $\phi 120 \times 74\text{cm} / 47.24 \times 29.13\text{in}$
Weight: 1.86kg/4.10lb
Compatibility: Bowens mount
Fabric Eggcrate: EC-PR120 (Optional)
Includes 2 diffusers: 1 and 2 Stops



SoftBox Parabolic 150

Item No.: SB-PR-150
Dimension: $\phi 150 \times 110\text{cm} / 59.06 \times 43.31\text{in}$
Weight: 1.86kg/4.10lb
Compatibility: Bowens mount
Fabric Eggcrate: EC-PR150 (Optional)
Includes 2 diffusers: 1 and 2 Stops



SoftBox MixPanel-60

Item No.: SB-MP60
Dimension: $38 \times 43 \times 21\text{cm} / 14.96 \times 16.93 \times 8.27\text{in}$
Weight: 0.3kg/0.66lb
Compatibility: MixPanel 60
Fabric Eggcrate: Included



SoftBox MixPanel-150

Item No.: SB-MP150
Dimension: $50 \times 45 \times 21\text{cm} / 19.69 \times 17.72 \times 8.27\text{in}$
Weight: 0.36kg/0.79lb
Compatibility: MixPanel 150
Fabric Eggcrate: Included



Octangle SoftBox MixPanel 150

Item No.: SB-MP150-O
Dimension: $\phi 112 \times 51.37\text{cm} / \phi 44.09 \times 20.22\text{in}$
Weight: 1.72kg/3.79lb
Compatibility: MixPanel 150



Lighting Modifiers

Lantern Softbox 60

Item No.: LT-FZ60
Dimension: φ45cm, 43cm height/φ17.72in, 16.93in height
Weight: 0.53kg/1.67lb
Compatibility: Forza 60, Forza 60B and Bowens mount
Skirt: Included



Lantern SoftBox 80

Item No.: LT-80
Dimension: φ80cm, 58cm height/φ31.50in, 22.83in height
Weight: 1.31kg/2.89lb
Compatibility: Bowens mount
Skirt: Included



Lantern Softbox 120

Item No.: LT-120
Dimension: φ120cm, 83cm height/φ47.24in, 32.68in height
Weight: 1.91kg/4.21lb
Compatibility: Bowens mount
Skirt: Included



Umbrella Deep Silver 135

Item No.: U-135DS
Dimension: φ135 x 88cm/53.15 x 74.02in
Weight: 0.92kg/2.03lb



Umbrella Deep Translucent 165

Item No.: U-165DT
Dimension: φ165 x 110cm/64.96 x 43.31in
Weight: 1.05kg/2.31lb



Umbrella Shallow Translucent 180

Item No.: U-180ST
Dimension: φ180 x 110cm/70.87 x 43.31in
Weight: 1.05kg/2.31lb



Lighting Modifiers

SoftBox Strip-140x30

Item No.: SB-ST-140x30
Dimension: 140 x 30 x 40cm/55.12 x 11.81 x 15.75in
Weight: 1.35kg/2.98lb
Compatibility: Standard Bowens mount
Fabric Eggcrate:Optional



SoftBox Asymmetric 110x45

Item No.: SB-AS-110x45
Dimension: 110 x 43 x 34cm/43.31 x 16.93 x 13.39in
Weight: 1.13kg/2.49lb
Compatibility: Standard Bowens mount
Fabric Eggcrate:Optional



Eggcrate for Compac

Item No.: EC-CP200/100
Dimension: 70 x 50cm/27.6 x 19.7in; 55 x 40cm/21.7 x 15.7in
Compatibility: Compac 200/200B/100/100B



Round/Lantern SoftBox Compac 200/200B

Item No.: SB-CP200-R/ LT-CP200-R
Dimension: 94.8 x 86.0 x 15.8cm/37.3 x 34.0 x 6.2in
Compatibility: Compac 200/200B



Round/Lantern SoftBox Compac 100/100B

Item No.: SB-CP100-R/ LT-CP100-R
Dimension: 76.5 x 63.0 x 15.8cm/30.1 x 24.8 x 6.2in
Compatibility: Compac 100/100B



Round/Lantern SoftBox Compac 68/68B

Item No.: SB-CP68-R/ LT-CP68-R
Dimension: 73.0 x 61.0 x 15.5cm/28.7 x 24.0 x 6.1in
Compatibility: Compac 68/68B



Accessories

CN-5B

NANLITE 2-in-1 reciprocal battery charger
Not only a charger but also a power bank
Input voltage: 5V 2.4A DC
Output Voltage: 8.4V (Max 1A) DC, 5V(Max 1A) DC
Compatibility: Sony NP-F, NP-FM series batteries
Power cord: Included



PA-7.5V2A

NANLITE power adapter 7.5V 2A
Compatibility:
NANLITE WiFi transmitter device, MixPad 11, etc.



CB-DT/DC

NANLITE D-TAP cable with DC socket
Compatibility:
NANLITE Forza 60, PavoTube series, SA series, etc.



BT-VBC-14.8V/26V

NANLITE V-mount Battery Converter
[Convert the battery from 14.8V to 26V]
For installing the 14.4-14.8V/12A V-mount battery,
allowing you to power fixture with an input voltage of
26V and output of 150W or below.



BT-CGV-26V-1

NANLITE battery charger for
single 26V V-mount battery
Compatibility:
26V V-mount battery



BT-CGV-26V-2

NANLITE battery charger for
dual 26V V-mount battery
Compatibility:
26V V-mount battery



BT-V-26V230/BT-V-26V270

NANLITE V-mount battery 26V 230WH/26V 270WH
Battery Capacity:
26V 230WH/26V 270WH
Compatibility:
NANLITE Forza 300, Forza 500, MixPanel 150 etc.



BT-CGV-14.8V-1

NANLITE Battery Charger for Single 14.8V V-mount Battery
Compatibility: 14.8V battery



BT-V-14.8V160

NANLITE V-mount battery 14.8V 160WH
Battery Capacity:14.8V 160WH
Compatibility:NANLITE Forza 60/60B, Forza 300



Accessories

RC-1

NANLITE bi-color remote controller Channel: 512
Control Distance:15M



BT-BA-SNP/V

NANLITE V-mount adapter for Sony battery
Compatibility: Sony NP-F series battery × 2 pcs



BT-BA-SNP/DC

Sony NP Battery adapter with DC socket



BT-BA-V

NANLITE external battery base
Compatibility: Sony V-mount battery



BT-SNP-6AA

NANLITE Sony NP-F mount adapter for 6 pcs AA batteries
Compatibility: LED light with Sony NP-F mount



CN-CGR-D / 3E / E8 / E6

NANLITE battery base adapter
Compatibility: Panasonic CGR-D battery Nikon battery
Canon E8 battery, Canon E6 battery



CN-W2

NANLITE WiFi control device
Power Source: 100-240V AC, NP-F series battery
Wireless Channel: 512
Control Distance: 30M



CN-B08

NANLITE hotshoe adapter
Compatibility: The light with 1/4"-20 screw



CN-B09

NANLITE metal clamp



AS-MT/HG-1/4

Mini Tripod & Hand Grip with 1/4 screw
Rotation Angle: 0°-120°
Dimension: 120 x 40mm/4.72 x 1.57 in
Compatibility: The light with 1/4"-20 screw connection



CN-D4

NANLITE professional rail system
Dimension: 3 x 3m/9.84 x 9.84ft



Accessories PROFESSIONAL CARRYING CASE

Forza 300/500 Carrying Case

Forza 500 2KIT-ST

Material: Oxford cloth, flannel
Inner Dimension:
64.5 x 32 x 32.5cm/25.39 x 12.60 x 12.80in
Outer Dimension:
66.5 x 34 x 36.5cm/26.18 x 13.39 x 14.37in
Weight: About 7kg/15.43lb



Trolley Case

CC-ST-85

Material: Cloth, MDF
Dimension: 61 x 34 x 59cm/24.02 x 13.39 x 23.23in
Weight: About 7.2kg/15.87lb
Packed Item:
600/900/1200 series x 3 pcs
LS-216-5/8 / LS-186-5/8 x 3 pcs



LED 2KIT Portable Bag

CN-T2

Material: Cloth, PVC
Dimension: 61 x 24 x 50cm/24.02 x 9.45 x 19.69in
Weight: About 4.3kg/9.48lb
Packed Item:
600/900/1200 series x 2 pcs
LS-216-5/8 / LS-186-5/8 x 2 pcs



Plastic Trolley Case

CC-PT-62

Material: ABS
Inner Dimension:
58.1 x 36 x 29.8cm/22.87 x 14.17 x 11.73in
Outer Dimension:
62.5 x 35.9 x 44.8cm/24.61 x 14.13 x 17.64in
Weight: About 2.3kg/5.07lb



Plastic Trolley Case

CC-PT-37

Material: ABS
Inner Dimension:
51 x 29 x 24cm/20.08 x 11.42 x 9.45in
Outer Dimension:
56 x 35.5 x 29cm/22.05 x 13.98 x 11.42in
Weight: About 2kg/4.41lb



LED 3KIT Portable Bag

CN-T3

Material: Cloth, PVC
Dimension: 61 x 35 x 50cm/24.02 x 13.78 x 19.69in
Weight: About 6.3kg/13.89lb
Packed Item:
600/900/1200 series x 3 pcs
LS-216-5/8 / LS-186-5/8 x 3 pcs



Plastic Carry Case

CC-P-38

Material: ABS
Dimension: 47 x 24 x 34cm/18.50 x 9.45 x 13.39in
Weight: About 2kg/4.41lb



Accessories LIGHT STAND

LS-186-5/8

Material: Aluminum alloy
Setting Height:
About 49-186cm/19.29-73.23in
Weight: About 5kg/11.02lb



LS-170-5/8

Material: Iron
Setting Height:
About 73-170cm/28.74-66.93in
Weight: About 3kg/6.6lb



LS-216-5/8

Material: Aluminum alloy
Setting Height:
About 50-195cm/19.69 x 76.77in
Weight: About 4kg/8.82lb



LS-288-5/8

Material: Iron pipe and aluminum section
Setting Height:
About 108-290cm/42.52-114.17in
Weight: About 6kg/13.23lb



LS-300-HD

Material: Aluminum alloy
Setting Height:
About 140-310cm/55.12-122.05 in
Weight: About 8kg/17.64lb



LS-C-330-5/8

Material: Aluminum alloy
Setting Height:
About 145-328cm/57.09-129.13 in
Weight: About 8.1kg/17.86lb





Backdrop Elevator Series

BE-U1

Electric expander set



BE-RC

Radio controller
Supply Voltage: 220V/110V
Control Distance: 15M



BE-RR

Radio Receiver



BE-3R

3-axle remote control electric background support elevator kit
Suitable for mounting on the wall or ceiling



BE-2RS

2-axle remote control electric background support elevator kit
Holder Hooks: Included
Suitable for mounting on the wall, ceiling or lighting stand



BE-4R

4-axle remote control electric background support elevator kit
Suitable for mounting on the wall or ceiling



BE-3RS

3-axle remote control electric background support elevator kit
Holder Hooks: Included
Suitable for mounting on the wall, ceiling or lighting stand



BE-6R

6-axle remote control electric background support elevator kit
Suitable for mounting on the wall or ceiling



BE-4RS

4-axle remote control electric background support elevator kit
Holder Hooks: Included
Suitable for mounting on the wall, ceiling or lighting stand



Backdrop Elevator Series

BE-1

1-axle manual background support kit
Suitable for mounting on the lighting stand



BE-3

3-axle manual background support kit
Suitable for mounting on the lighting stand



BE-6

6-axle manual background support kit
Suitable for mounting on the lighting stand



BE-R3

Assembled tube set
Diameter: $\phi 5.1\text{cm}/2.01\text{in}$
Assembled Length: 300cm/118.11in
Length of each bar: 100cm/39.37in
Suitable for hanging up manual control or electric background support elevator



BE-2

2-axle manual background support kit
Suitable for mounting on the lighting stand



BE-4

4-axle manual background support kit
Suitable for mounting on the lighting stand



BE-SK1

Background support stand
Max. Height: 286cm/112.60in
Length: 300cm/118.11in
Length of Each Cross Bar: 100cm/39.37in

